


Split Core Current Transformer

Casted with shielded secondary cable

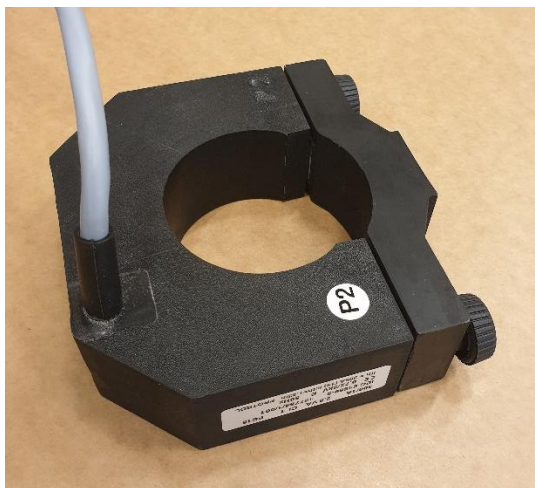

Description

Split core current transformer of casted type for larger cable diameters. Shielded secondary cable.

Assembly on HV cable is made without tools.

Technical Data

General

Ratio:	300 A / 1 A
Thermal current:	133% (400 A)
Opening:	48 mm
Diameter:	65 mm
Class:	Class 1, FS15
Insulation class:	0.72 / 3 kV
Short-circuit current:	20 kA
Temperature range:	-40°C to 80°C

Ordering Information

Product Code

The product code is specified as 606581(-X).

Options

The current transformer can be supplied with shorter or longer secondary cable.

Option X = Special length secondary cable

4 – Option, 4 m cable

8 – Basic version, 8 m cable

15 – Option, 15 m cable

Please note that other lengths than 8 m must be manufactured on demand. Please contact us for more information if this option is of interest.

The secondary cable is shielded for all lengths.